



P04U0




RE-USABLE EARPLUG WITH SAFETY CORD.

SNR: 32dB

Std = Standard Deviation APV = Assumed Protection Value H = High frequency attenuation value M = Medium frequency attenuation value L = Low frequency attenuation value Tested according to EN352-2	Dome diameter range: 7-12mm								H:30dB M:32dB L:31dB				
	f/Hz	63	125	250	500	1000	2000	4000	8000				
	Mean (dB)	40,1	38,1	32,4	35,5	41,4	31,2	32,8	40,4				
	StD (dB)	5,2	3,8	4,4	5,0	5,8	2,9	2,4	3,1				
	APV (dB)	34,9	34,3	28,0	30,5	35,3	28,4	30,4	37,3				

INSTRUCTIONS:

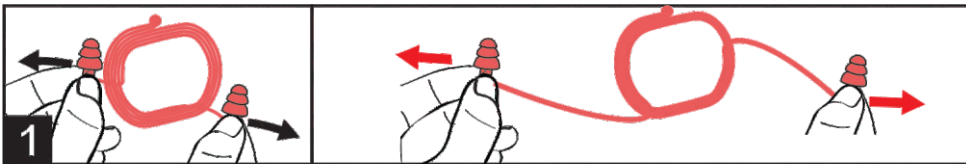

PULL TO UNCOIL



LIFT EARLOBE & INSERT

CHECK FOR CORRECT FIT

CLEAN USING MILD SOAP AND WATER

RETURN USED PLUXONE FOR RECYCLING



NO. 1 FOR COST, COMFORT, SAFETY & HYGIENE



LOWER COSTS



LOWEST UNIT COST,
CAN LAST LONGER
EASY & FAST CLEANING

BETTER COMFORT




SOFT EARPIECES
SOFT FLEXIBLE CORD

BETTER SAFETY & HYGIENE

+ HYGIENIC DESIGN



SINGLE FLEXIBLE PART
SMOOTH & NO GAPS
EASY TO CLEAN AND DRY.



HYGIENIC
AUTOMATED
MANUFACTURING




FOOD SAFETY
PERSONAL HYGIENE

NO DISCONNECTING IF PULLED



FOOD SAFETY
LASTS LONGER

SAFETY CORD YIELDS IF CAUGHT UP

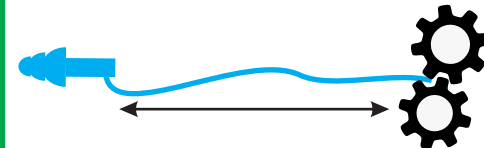

PERSONAL SAFETY
SAFE TO USE @ MACHINES

Old technology corded earplugs




EXPENSIVE OLD TECH
FALLS APART PREMATURELY
CLEANING NIGHTMARE





HARD / TOO BIG EARPLUGS
SOME CORDS ARE HARD

BACTERIA TRAPS,
CANNOT CLEAN & DRY:
IDEAL FOR BACTERIA GROWTH

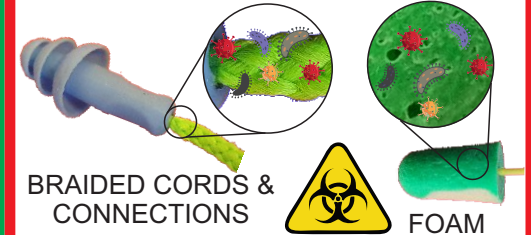

BRAIDED CORDS &
CONNECTIONS



HAND CONTACT
MANUFACTURING



FOOD SAFETY RISK
PERSONAL HEALTH RISK

DISCONNECTS IF PULLED +9mm




FOREIGN
OBJECT RISK
AT FOOD
PLANTS

BRAIDED AND EXTRUDED CORDS
DOES NOT YIELD IF CAUGHT UP.



LETHAL RISK



DO NOT USE @ MACHINES